



- **LIFT HEIGHTS 57 - 167 FEET**
- **LIFT CAPACITIES 8,800 - 28,600 LBS.**
- **MANY MACHINES IN ONE**
 - *TELESCOPIC FORKLIFT*
 - *ROUGH TERRAIN CRANE*
 - *AERIAL WORK PLATFORM*

MAGNI
TELESCOPIC HANDLERS

RTH
SERIES
Rotating Telescopic Handler



LIFT CAPACITY
8,800 to 28,600 lbs.
BEST LOAD CHARTS AVAILABLE



LIFTING HEIGHTS
57-167 feet



MAXIMUM REACH
113 feet



3-MACHINES IN ONE
TELESCOPIC FORKLIFT
ROUGH TERRAIN CRANE
WORK PLATFORM



.98 - 1.2 feet
GROUND CLEARANCE



UNIQUE CAB DESIGN



- Registered Design resulting in Industry Leading Productivity
- Unrivalled Visibility
 - Ability to see the load from bottom to top
 - Large upper windshield
- Enhanced Comfort (Standard A/C, Heat & Filter System)
- Fits all Body Sizes Comfortably
- Mechanical Suspension Seating
- Moveable Steering Column
- ROPS / FOPS Safety Certification
- Dual Joysticks with 4-function Simultaneous Controls
- Boom Tip and Rear Cameras with Voice and Cab Mounted Split Screen Monitor
- Mug-holder



100% air filtration



Pressured cab FOPS/ROPS



Air conditioning/Heating



Mug-holder


RADIO REMOTE CONTROLS



- Standard Remote & Platform in One
 - Remote control of hydraulic movements
 - Controls work platform
 - Electronic joystick
- Special Platform & Remote Control
 - Drive the machine using the remote
 - Additional control of outriggers & machine movement

SUPERIOR CONFINED SPACE PERFORMANCE


- Ease of use in narrow areas
- Proportional outrigger monitors for industry leading machine capacity when not fully extended
- 3 Types of Steering
 - Front
 - All Wheel
 - Crab

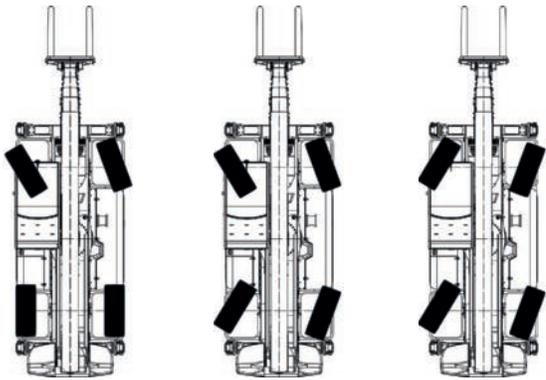

MAGNI COMBI TOUCH SYSTEM



- User Friendly
- Full Color Touch Display Panel
- Ultimate Safety

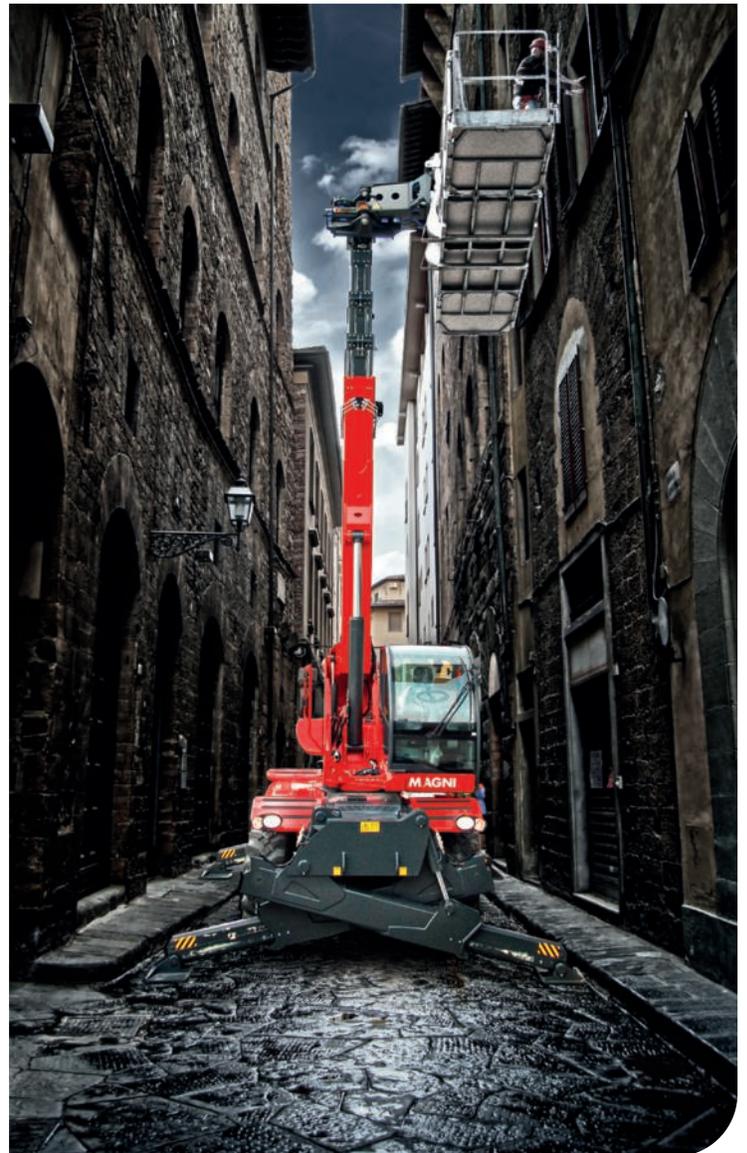


DRIVING PAGE

- Provides data about the transmission.
- Make steering selection
 - Front axle
 - Crab
 - 4-wheel.



STABILIZATION PAGE

- Dynamic independent stabilizer control (from 0 - 100%) ensures machine will always have the best load chart possible.
- Auto leveling.

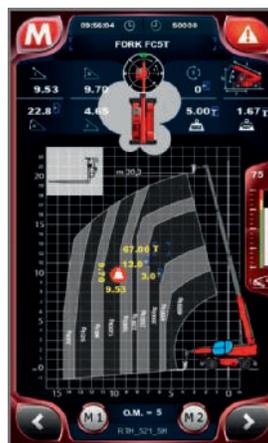

LOAD CHART PAGE

- LMI meets crane regulations.
- Dynamic load chart allows operator to see the load center on the chart.
- Warns operator of overload and over hoist conditions.



COMMAND PAGE

- Full HVAC controls.
- Lighting controls.
- Cabin to remote control synchronization.



CUSTOMIZATION PAGE

- Create safe zones by setting limits for turret rotation & working height.
- Adjust hydraulic speeds to allow for better execution of dangerous, precise or repetitive maneuvers.
- Customized operator settings - up to 4 stored profiles.

ATTACHMENTS PROVIDE ULTIMATE FUNCTIONALITY

FORKS



- Construction Carriages 48", 60", 72"
- Forks 48", 60", 72", 84"
- Rotating 360°

WINCHES



- 1,950 lbs.
- 5,950 lbs.
- 7,700 lbs.
- 11,000 lbs.
- 13,200 lbs.
- 17,600 lbs.
- 28,600 lbs.

JIB WITH WINCH



- 1,760 lbs.
- 1,950 lbs.
- 3,300 lbs.
- 4,400 lbs.
- 6,600 lbs.

WORK PLATFORMS



- Capacities up to 2,200 lbs.
- Rotating Extendable 8' to 23'
- With Jib Winch
- Telescoping Pivoting
- Telescoping Pivoting Over/ Under
- Roof
- Tunnel

JIB WITH HOOK & TELESCOPIC JIB




- Fixed - 9' (4,400 lbs.)
- Telescopic - 6' (5,500 lbs.) to 9' (3,300 lbs.)

STATIC HOOK



- 11,000 lbs.
- 13,200 lbs.
- 17,600 lbs.
- 28,600 lbs.

SPECIALTY ATTACHMENTS



- Glass Installation
- Tree Cutting
- Horizontal Drill

RADIO REMOTE CONTROLS



- Remote & Platform in One

BUCKETS



- Loose Material



- Continuous Rotating Fork



- Enhanced Remote includes Hydraulic, Outriggers and Machine Movement



- Demolition

THIS IS WHAT MAGNI USERS HAVE TO SAY...



"I like this machine! Sophisticated, but easy to operate, fast and reliable, no wasting time with this machine. It takes a minute to switch from being a crane, back to a forklift. I wish these machines were around years ago."
- Machine Operator

"Hands down, one of the best purchases I ever made for our company. Everything I was told about the machine is true."
- Construction Company Purchasing Manager

"After all the research, demonstrations, and shopping for the best rotating telehandler, Magni hands down was the best choice and greatest value for our money."
- Construction Company Owner

MAGNI AT A GLANCE



		MAXIMUM LIFTING HEIGHT	FORWARD REACH	MAXIMUM LIFTING CAPACITY	CAPACITY AT MAX. HEIGHT	MACHINE WEIGHT
		feet / inches	feet / inches	lbs.	lbs.	lbs.
Pivoting Stabilizer	4.18	58	47	8,800	6,600	31,750
	5.18	57 / 2	46 / 9	11,000	6,620	33,920
	5.21	67 / 3	57 / 1	11,000	5,500	35,050
	5.23	74	62	11,000	4,400	36,155
	5.25	82	62 / 3	11,000	4,400	36,595
Telescopic / Scissor Type Stabilizers	6.21	68 / 3	57 / 4	13,200	7,700	38,800
	6.23	76 / 4	64 / 6	13,200	6,600	39,685
	6.25	82	69 / 10	13,200	4,850	39,680
	6.30	97 / 9	85 / 4	13,200	5,500	48,060
	6.35	114 / 6	88 / 6	13,200	6,600	52,910
	6.39	127 / 7	88 / 7	13,200	5,000	52,910
	6.46	150	105	13,200	5,500	67,460
	6.51	167 / 4	113 / 2	13,200	4,400	80,240
	7.26	84 / 3	72 / 2	15,500	7,050	45,635
	8.25	81 / 8	69 / 2	17,500	11,600	52,910
	13.26	85 / 11	69 / 10	28,600	17,600	67,460

MEMBERSHIPS



AWARDS



Winner 2016, 2017, 2019
Product Innovation Telehandlers



Winner 2016, 2017, 2018, 2019
Innovative Lifting Equipment -
Material Handlers





CONSTRUCTION



CONCRETE CONSTRUCTION



CONCRETE CONSTRUCTION



MASONRY



FRAMING



STEEL ERECTION




STEEL ERECTION



FRAMING



BRIDGE WORK



INDUSTRY



GLASS INSTALLATION



CONSTRUCTION




CONSTRUCTION



FEATURED PROJECTS



ROOFING

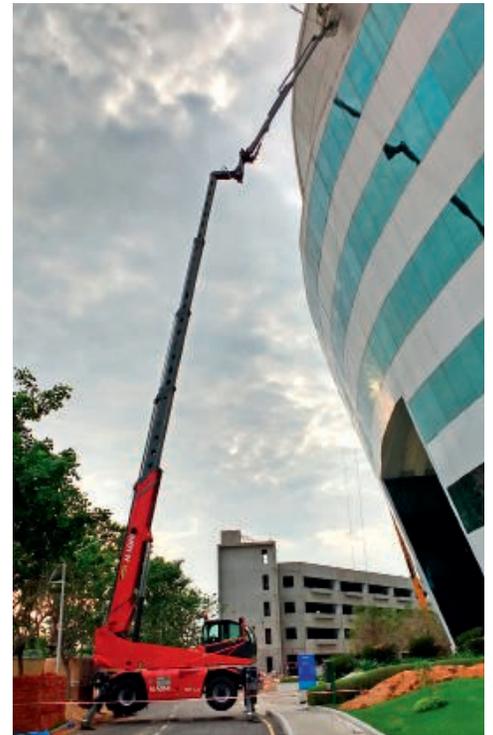

MAINTENANCE & RESTORATION



FEATURED PROJECTS



FEATURED PROJECTS



Magni Telescopic Handlers Srl

Via Magellano, 22 – 41013 Castelfranco Emilia (MO)
Tel. +39 059 8630811- Fax +39 059 8638012
commerciale@magnith.com - www.magnith.com



U.S. Headquarters

616 West 1st Avenue
Roselle, NJ 07203

sales@MagniAmerica.com
(908) 280-8889

Toll Free: (833) MagniUS
(833) 624-6487

www.magnith.com